

2500-SPRVSR


Analog Command Center

Two-Way Communication (Area of Refuge)



Compliant supervision for monitoring communication pathways.

- Connects to each 2400 Series call box and phone line.
- Communications failure relay output for integration with fire alarm modules or control panels.
- Monitors remote call boxes and phone lines, and triggers an alert if a component fails.

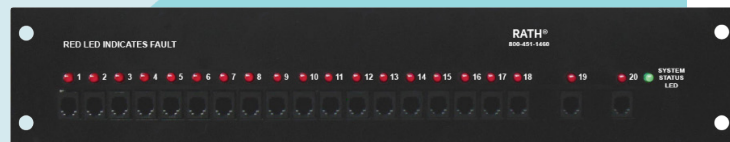

Specifications

Part Numbers	12 Zones: 2500-12SPRVSR / 16 Zones: 500-16SPRVSR 28 Zones: 2500-28SPRVSR / 36 Zones: 2500-36SPRVSR 56 Zones: 2500-56SPRVSR / 76 Zones: 2500-76SPRVSR 96 Zones: 2500-96SPRVSR / 116 Zones: 2500-116SPRVSR
Dimensions	12/16 Zone: 3-1/2" H x 19-1/4" W x 6" D 28/36 Zone: 7" H x 19-1/4" W x 6" D 56 Zone: 10-1/2" H x 19-1/4" W x 6" D 76/96 Zone: 14" H x 19-1/4" W x 6" D
Mounting	Wall Mounted Swing-Out Bracket
Connections	RJ11 to call boxes and phone lines; punch-down terminals to Distribution Module
Power Requirements	12 VDC (includes UL-listed transformer for 120 VAC source or use RATH RP7700104 / RP7701500)
Monitor	Monitors remote call boxes and phone lines; triggers relay output if a component is not detected
Optional Component	To order without the UPS Monitor (2500-UPSMONITOR included unless specified), add an "N" to the end of the model number (ex: 2500-12SPRVSRN)
Warranty	2 years
Code Compliance	NFPA 72 (2016) 360° supervision



Rev Sep 25

AVIRE

N56 W24720 N. Corporate Circle Sussex, WI 53089
800-451-1460 | sales.us@avire-global.com
avire-global.com/en-us