



Picture PSP01 Display

Installation Guide

06-E-01-IG-01-GB

Items Required for Installation

- + Screen
- + Lens
- + Speaker

Mounting Instructions (Display Panel and Power Supply)

- 1. Before installation please ensure there is sufficient air space around LCD unit for ventilation
- 2. Remove from box and unpackage lens and screen panel
- 3. Carefully remove protective film from both sides of lens
- 4. Mount the lens.
- 5. Attach the screen with mounted lens to the fixing studs behind COP panel using a flat and spring washer on each stud before engaging nut
- 6. Mount speaker if desired
- 7. Power supply must be mounted within 1.5m but no closer than 1m
- 8. Plug power socket into display
- 9. Connect 240V main power to the power supply*



Caution

- + Risk of electric shock. Never remove the casing of the unit
- + Please take all necessary anti-static precautions before handling equipment
- + Ensure that the Power Supply is connected properly and that the voltage is correct before turning on the System
- + Handle LCD unit with care. Do not knock and place heavy object on top surface of the LCD unit


^{*}Please adhere to instructions on power supply

Wiring Connections



Notes

VOL – This allows User to adjust the Volume for the Speaker output. By default, this is set to 50%

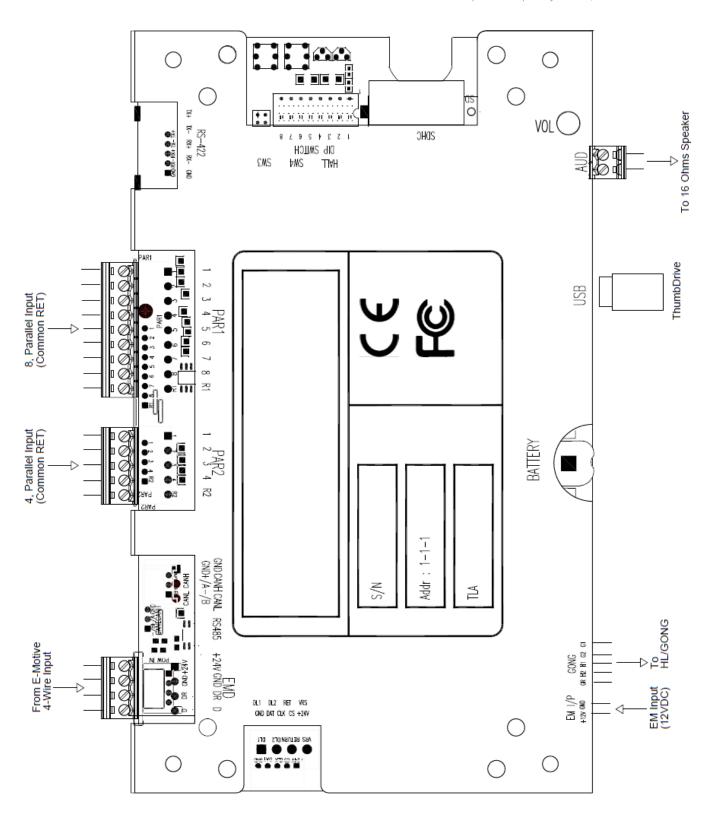



E-Motive is a brand of Avire

Avire Ltd

Unit 1, The Switchback Gardner Road Maidenhead Berkshire SL6 7RJ, UK T: 01628 540100

F: 01628 621 947

E: sales.uk@avire-global.com

W: www.avire-global.com



