


Is it possible to connect a Siren to the DAU?

Yes, an external Siren can be connected to the DAU by following the connection diagram. Please note that this application cannot be used for LPBUS DAU.



DAU COP LPBUS

Siren connection

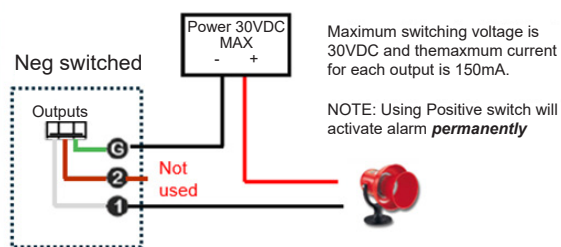

AVIRE 3 Core Connection Cable will be required

DAU TOC LPBUS

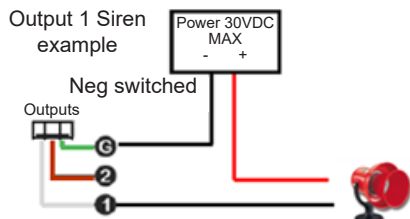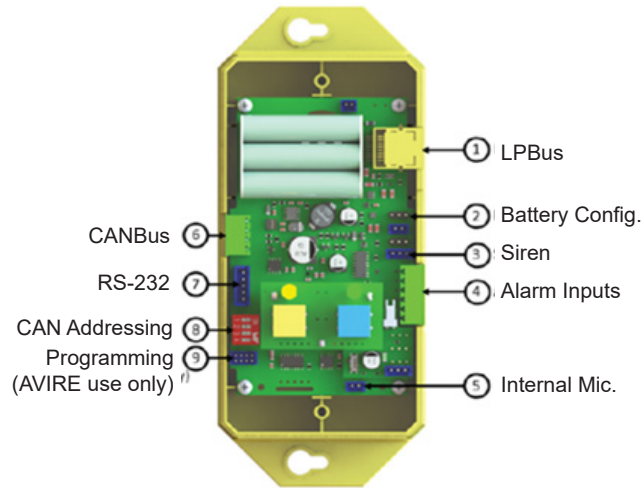

Maximum switching voltage is 30VDC and the maximum current for each output is 150mA.

NOTE: Using Positive switch will activate alarm **permanently**

1	Cable		
	Ground Green	Output 2 Brown	Output 1 White

2	Parameter Value	Description
	0	Permanent Standby Output
	1	Permanently activated output
	2	Filter alarm button
	3	Alarm push button without filter
	4	Error in the last test or DCP disconnected
	5	Damaged or disconnected battery error

3	DAU Parameter	Description	Parameter Value (Default)	SIREN
	P145	Output 1	0	3
	P146	Output 2	0	-
	Program by SMS: Pin1234,p1453			

NOTE: When using TOC DAU and COP DAU accessory, both will trigger the siren from the alarm button.

AVIRE 3 Core Connection Cable will be required to be connected to (3)