


# Area of Refuge Sign

7046

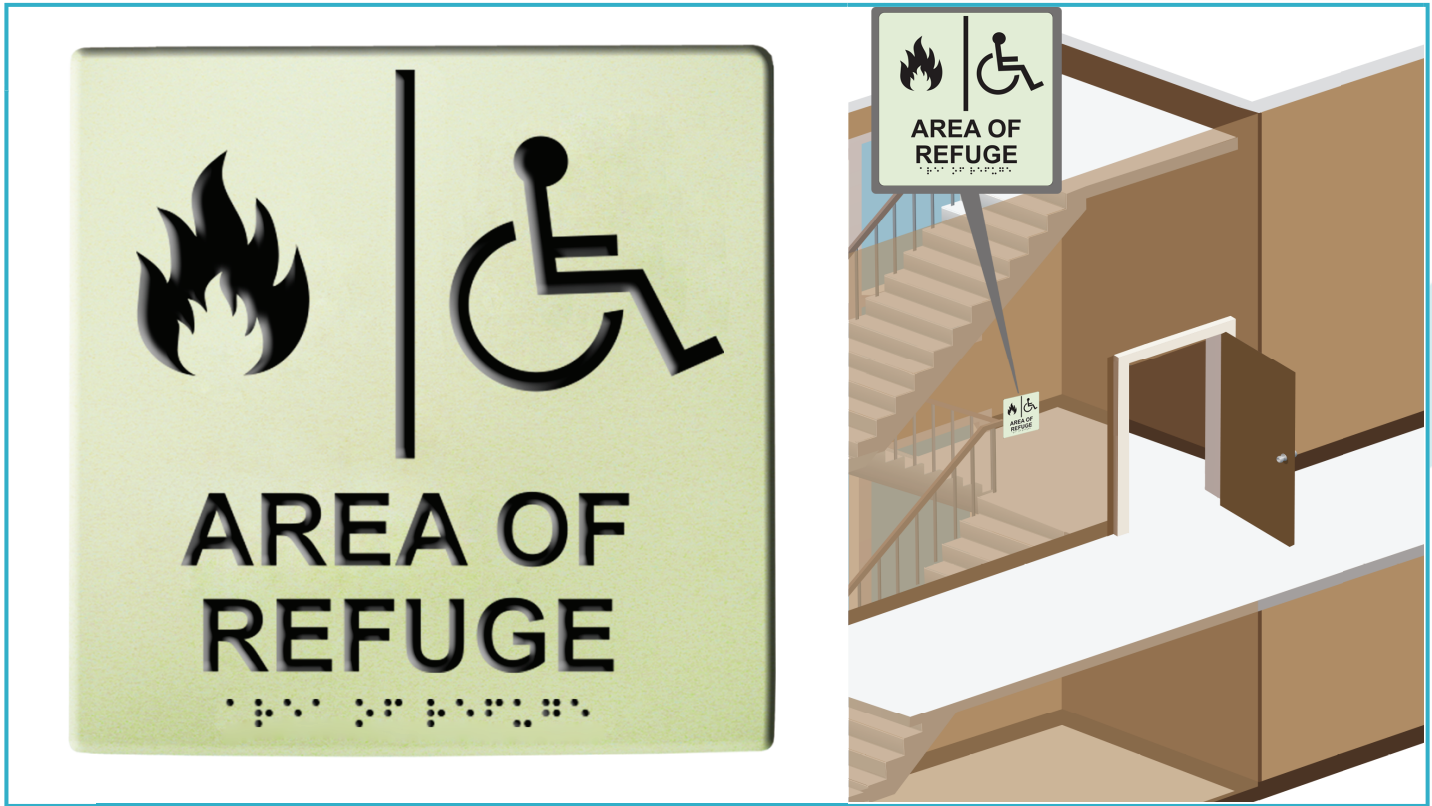

## SIGN SPECIFICATIONS:

- 7-3/4" H x 7-3/4" W
- Raised letter and braille
- Peel and stick mounting for easy installation
- Sign should be mounted above 60" but below 80" from floor to top of sign
- IBC, NFPA, and ADAAG code compliant
- 2 year warranty

## PHOTOLUMINESCENT MATERIAL SPECIFICATIONS:

- Base material is PVC and a non-toxic pigment is added to create the photoluminescent effect
- Material is listed under UL 1994
  - After being exposed to 1 foot candle of light for 60 minutes, a minimum luminance shall be 30 millicandelas per square meter at 10 minutes and 5 millicandelas per square meter after 90 minutes
- Also meets IBC 2015 Section 1025.4 and New York Local Law 24
- Typical material life expectancy is 25+ years