


Relay Control Card

2500-LUPSM

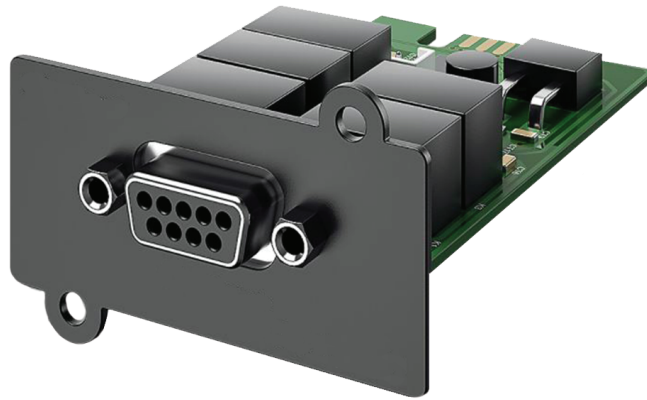

Part #: 2500-LUPSM
Dimensions: 0.6" H x 1.65" W x 3.2" D
Weight: 0.11 lbs.

- Relay I/O card for UPS status monitoring
- Input Signal Contact: 1 – UPS shutdown in Battery Mode
- Output Relay Rating (Max.): 30vdc/125vac, 3A (per relay)
- External S/D Voltage: 7.5v to 12v
- Operating Temperature: 32°F to 104°F (0°C to 40°C)
- Operating Humidity: 0% - 95% non-condensing
- Operating Elevation: 0-0000 feet (0-3000 meters)
- Storage Temperature: 14°F to 122°F / -10°C to 50°C
- Storage Relative Humidity: 0% - 95% non condensing
- Storage Elevation: 0-50000 feet (0-15000 meters)
- 5 relay output contact closures indicating UPS status info
- 1 relay input contact closure to shutdown UPS on battery mode
- Connections via DB9 port
- Hot-swappable (plug-n-play)
- RoHS compliant
- 2 year warranty