

SmartView Two-Way Elevator Visual Communication System

2100-SVD

RATH  **JANUS**
by AVIRE



SmartView Display

Part #'s

- **2100-SVD** (0.0625" window)
- **2100-SVDA** (0.125" window)
- **2100-SVDB** (0.109" window)
- **2100-SVDC** (0.078" window)
- **2100-SVDE** (0.118" window)

Specifications:

Dimensions: 6.99" H x 12.04" W x 1.98" D

Mounting: 32° F to 158° F (0° C to 70° C)

Design: Mounting Plate Included

Warranty: 2 Years

CODE COMPLIANCE:

- Certified to CSA Standard B44.1, conforms to ASME Standard 17.5

POWER REQUIREMENTS:

- 5V/1A power supply with 5.5mm barrel connector, or powered by the SmartView Controller

WIRING REQUIREMENTS:

- Includes 20' power cable and 20' HDMI cable to connect to the SmartView Controller

FEATURES:

- Includes clear protective window
- 5" screen size
- 3/16" default text size
- 800 x 480 pixels
- 75° viewing angle)


SmartView Display

2100-SVD


by AVIRE



Front View

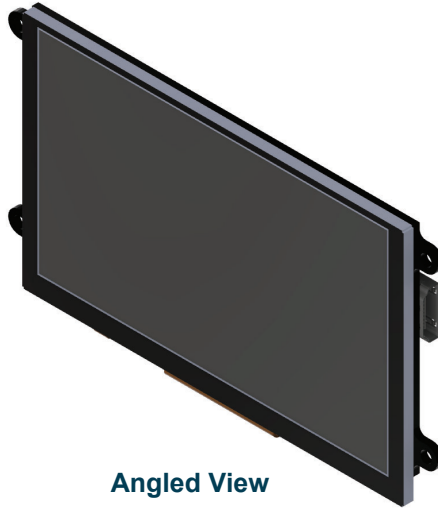

Angled View



Side View

