

SmartView 2 Machine Room Unit

7100



Part #: 7100

The SmartView 2 Machine Room Unit provides the conversion from twisted pair to ethernet and POTS line and power to the SmartView 2 Elevator unit. This is essential to the system for connectivity of audio / video to the outside world and power. The requirement of the system is one SmartView Machine Room unit to one SmartView 2 Elevator unit, without both in a system the SmartView 2 will not function.

Specifications:

Dimensions: 1.63" H x 6.10 " W x 4.25 " D

Mounting: Wall Mount

Warranty: 2 Years

Environmental: 32° F to 122° F (0° C to 50° C)

Current Draw: Active = 1A Idle = 0.5A

CODE COMPLIANCE:

- Conforms to ASME Standard 17.1, Certified to UL 62368-1

POWER REQUIREMENTS:


- **Power Supply:** 24vdc UL Rated Power Supply with a current rating of 1.66A or greater (Comes with 7100)
- **Connections:** Ethernet, USB, Telephone, Screw Terminals

WIRING REQUIREMENTS:

- Plug 24vdc, 1.66A power supply into 'POWER' on device
- Plug Ethernet internet cable into ETH2 on device
- Plug telephone line RING and TIP into TEL IN
- Connect elevator phone and machine room device via PLC on both devices

Note: All connections require attention to ensure correct polarity of positive (+) and negative (-). This also applies to RING and TIP on TEL IN

SmartView 2 Machine Room Unit 7100

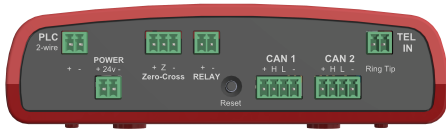

Front View



Back View



Angled View

Mounting Guide:

