

2400-805 Surface Mount Call Boxes

Analog Command Center Two-Way Communication (Area of Refuge)



Hands-free emergency communication for rescue assistance.

- Single home run wire for each call box enables easy, cost-effective installation.
- Location message provides site-specific call identification.
- Triggered alert when line loss is detected.
- Call button and LED call indicator.
- Scalable, reliable, and compliant solution connects directly to an addressable fire alarm module or panel, adhering to all industry standards.



Specifications

Part Numbers	2400-805SP	2400-80SPM	2400-805RP	2400-805SPC2
Dimensions	7-1/4" H x 4-3/4" W x 1-7/8" D	7-1/4" H x 4-3/4" W x 1-7/8" D	7-1/4" H x 4-3/4" W x 1-7/8" D	Face Plate: 10" H x 6-17/25" W Back Box: 9-7/8" H x 6-1/2" W x 3" D Cover: 9-3/4" H x 6-1/2" W x 1-1/4" D
Enclosure	Stainless Steel Box	Stainless Steel Box with Mushroom Push Button	Red Powder-Coated	Stainless Steel Box with Cover
Mounting	Surface Mount			
Weight	2.25 lbs			
Wiring Requirements	1 pair 22-24 AWG			
Maximum Wiring Distances	6,200 ft for 22 AWG and 3,900 ft for 24 AWG.			
Programming	On-site programming, Recordable location message (25 seconds)			
Phone Capabilities	Automatic answer feature with audible ring			
Supervision	Can be obtained with addition of Supervisory Module (2500_SPRVSR)			
Power Source	Distribution module			
Electrical	Hardwired transformer: 24 VAC / 5 VA @ 120 VAC / 60 Hz source Battery (supplied): 7.2 VDC @ min 1.3 Ah			
Environmental	32°F to 120°F			
Warranty	2 years			
Code Compliance	IBC, NFPA 72, ADA			

Compatible with the Following: RATH Command Center




Rev Sep 25

AVIRE

N56 W24720 N. Corporate Circle Sussex, WI 53089
800-451-1460 | sales.us@avire-global.com
avire-global.com/en-us

2400-805SP, 2400-805SPM and 2400-805RP

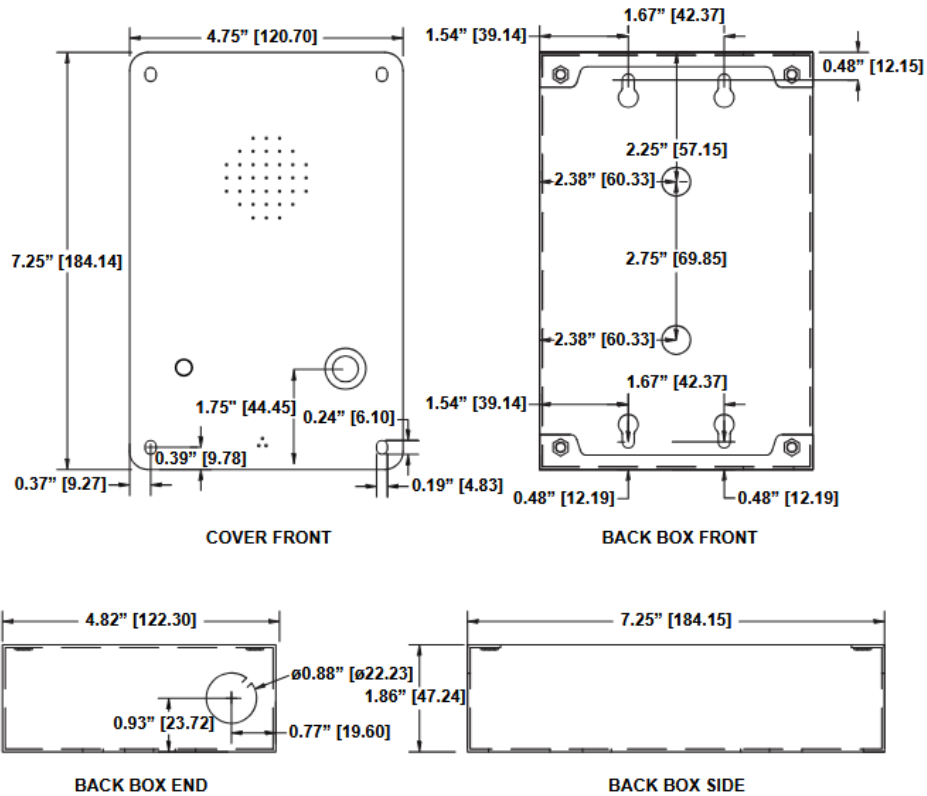

2400-805SSPC2

