

7200M-CE SmartView 2

Two-Way Voice & Visual Text Communication System with CE Integration



Multi-Purpose solution for elevator cars requiring two-way communication.

- Combines SmartView 2 with CE Elite PI® display for elevator positioning, branding, and emergency communication.
- External USB camera and emergency phone maximize space within the elevator panel.
- Power and data run over a single wire pair for streamlined installation.
- Configure on-site with a laptop or mobile device.
- Encrypted software safeguards system and network integrity.
- Remotely monitored via SmartView Hub.



Specifications

	Elevator Unit	Machine Room Unit
Part Numbers	7200M-CE*	7100*
Mounting	Behind-the-Panel	Wall Mount
Dimensions	3.72" H x 5.59" W x 1.77" D	4.25" H x 6.10" W x 1.73" D
Enclosure	Powdered-Coated Stainless Steel and Heavy-Duty ABS	Heavy-Duty ABS
Weight	0.45 lb.	0.65 lb.
Power Source	Machine Room Unit (7100)	110 VAC
Wiring Requirements	Connect via 18 AWG single pair to Machine Room Unit (7100)	Ethernet
Environmental	32°F - 122°F	32°F - 122°F
Warranty	2 years	2 years
Code Compliance	ASME A17.1 2019/CSA B44-19, IBC 2018, FCC part 15, ISED, and ADA. UL listed.	ASME A17.1 2019/CSA B44-19, IBC 2018, FCC part 15, ISED, and ADA. UL listed.
Voltage	24 VDC (from Machine Room Unit)	24 VDC
Included	7200M hardware on mounting bracket, Terminal connectors	7100 hardware, 24 VDC transformer, Terminal connectors, Mounting kit
Optional Equipment	Voice and data cellular gateways, Backup power options, In-building communication systems	Voice and data cellular gateways, Backup power options, In-building communication systems
Site Requirements	Yes / No or Door Open / Door Closed buttons on the elevator panel, External USB camera (RATH part 2100-SVCF), External elevator emergency phone	110 VAC battery backed up power, Outbound routed internet connection

*One Elevator Unit and one Machine Room Unit required for each elevator car.



AVIRE
N56 W24720 N. Corporate Circle Sussex, WI 53089
800-451-1460 | sales.us@avire-global.com
avire-global.com/en-us

Regulatory Information

Industry Canada No.	C22.2 No.60950-1-07, 2nd Ed: 33399-7100
FCC Reg. No.	AW7TE01A7200


Electrical

Transformer	120 VAC @ 60 Hz input, 24 VAC @ 2.5A output
-------------	---


Compatible with the following SmartView In-Building Communication Systems:

RATH Command Center and RATH SmartRescue (when used with RATH 2100 series phones)

7200M-CE Elevator Unit

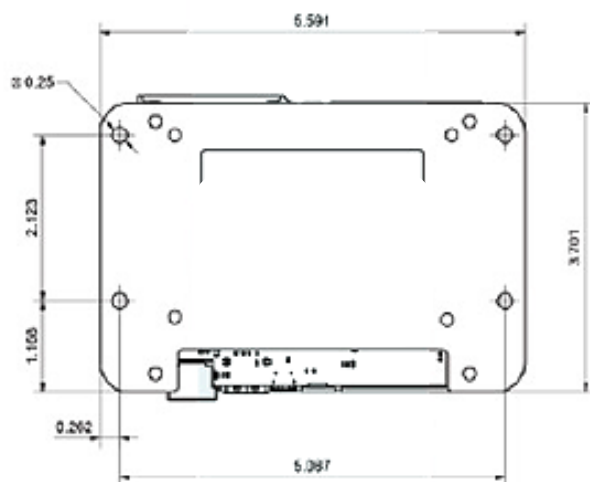

7100 Machine Room Unit

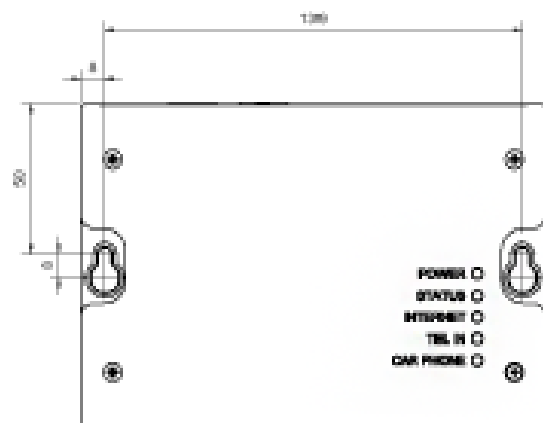

Rev Sep 25

AVIRE

N56 W24720 N. Corporate Circle Sussex, WI 53089
800-451-1460 | sales.us@avire-global.com
avire-global.com/en-us