

# 2400-805LP Series

Analog Command Center System Exterior Rated Call Boxes



## Durable emergency communication for Analog Command Center Systems.

- NEMA 4 fiberglass enclosure protects against exterior conditions.
- Hands-free, two-way voice communication.
- Home-run wiring simplifies installation and reduces wiring costs.
- Recordable location message identifies the caller's location.
- Available with or without a protective cover.
- Compliant with IBC, NFPA 72, and ADA requirements.



## Specifications

|                       | 2400-805LP                                                              | 2400-805LPC1                           |
|-----------------------|-------------------------------------------------------------------------|----------------------------------------|
| Enclosure             | NEMA 4 Rated Red Fiberglass                                             | NEMA 4 Rated Red Fiberglass with Cover |
| Protective Cover      | No                                                                      | Yes                                    |
| Enclosure             | Stainless Steel                                                         | Stainless Steel                        |
| Faceplate Dimensions  | 7.25" H x 4.75" W x 1.875" D                                            | 10.0" x 6.68"                          |
| Back Box Dimensions   | -                                                                       | 9.875" x 6.5" x 3.0"                   |
| Cover Dimensions      | -                                                                       | 9.75" x 6.5" x 1.25"                   |
| Weight                | 6.6 lbs                                                                 | 7.1 lbs                                |
| Mounting              | Surface Mount                                                           |                                        |
| Wiring                | Single pair, 22–24 AWG                                                  |                                        |
| Max. Wiring Distance  | 6,200 ft (22 AWG)   3,900 ft (24 AWG)                                   |                                        |
| Programming           | On-site; 25-second recordable location message                          |                                        |
| Phone Capabilities    | Automatic answer with audible ring                                      |                                        |
| Supervision           | Wire integrity and communication when paired with the RATH® 2500-SPRVSR |                                        |
| Power Source          | RATH® 2500 Distribution Module                                          |                                        |
| Operating Temperature | 32°F to 120°F                                                           |                                        |
| Warranty              | 2 Years                                                                 |                                        |

# AVIRE


N56W24720 N Corporate Cir., Sussex, WI 53089

800-451-1460

[sales.us@avire-global.com](mailto:sales.us@avire-global.com)

[avire-global.com/en-us](https://avire-global.com/en-us)

## 2400-805LP, 2400-805LPC1

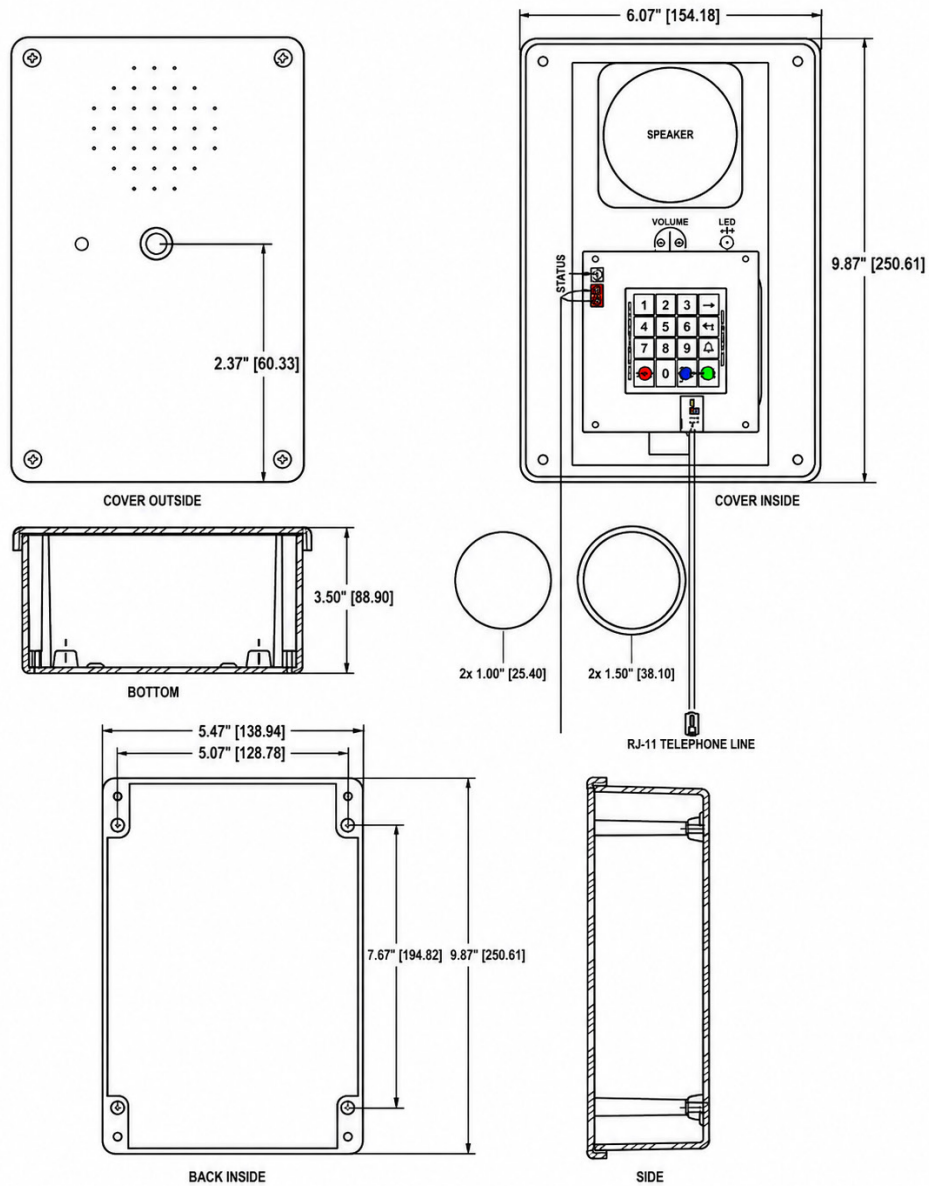

# AVIRE

N56W24720 N Corporate Cir., Sussex, WI 53089

800-451-1460

sales.us@avire-global.com

[avire-global.com/en-us](http://avire-global.com/en-us)