

2400-808 Series

Analog Command Center System Flush Mount Call Boxes



Reliable emergency communication for Analog Command Center Systems.

- Hands-free, two-way voice communication.
- Home-run wiring simplifies installation and reduces wiring cost.
- Recordable location message identifies the caller's location.
- Supervises communication when paired with the RATH® 2500-SPRVSR.
- Available in multiple button and enclosure configurations.
- Compliant with IBC, NFPA 72, and ADA requirements.



Specifications

	2400-808NSPM	2400-808NSP	2400-808NMP	2400-808SSPC2
Button Style	Mushroom	Standard	Standard	Standard
Protective Cover	No	No	No	Yes
Enclosure	Brushed Stainless Steel	Brushed Stainless Steel	Antique Bronze	Brushed Stainless Steel
Faceplate Dimensions	9.5" × 7.5"	9.5" × 7.5"	9.5" × 7.5"	11.375" × 8.0"
Back Box Dimensions	8.0" × 6.0" × 3.0"*	8.0" × 6.0" × 3.0"*	8.0" × 6.0" × 3.0"	9.875" × 6.5" × 3.0"*
Cover Dimensions	—	—	—	9.75" × 6.5" × 1.25"
Weight	7.0 lbs	7.0 lbs	7.0 lbs	7.5 lbs
Mounting	Flush Mount			
Wiring	Single pair, 22–24 AWG			
Max. Wiring Distance	6,200 ft (22 AWG) 3,900 ft (24 AWG)			
Programming	On-site programming with 25-second recordable location message			
Phone Features	Automatic answer with audible ring			
Supervision	Wire integrity and communication when paired with the RATH® 2500-SPRVSR			
Power Source	RATH® 2500 Distribution Module			
Operating Temperature	32°F to 120°F			
Warranty	2 Years			

*Back box sold separately.

AVIRE


N56W24720 N Corporate Cir., Sussex, WI 53089

800-451-1460


sales.us@avire-global.com

avire-global.com/en-us

2400-808NSPM, 24000-808NSP, 2400-808NMP

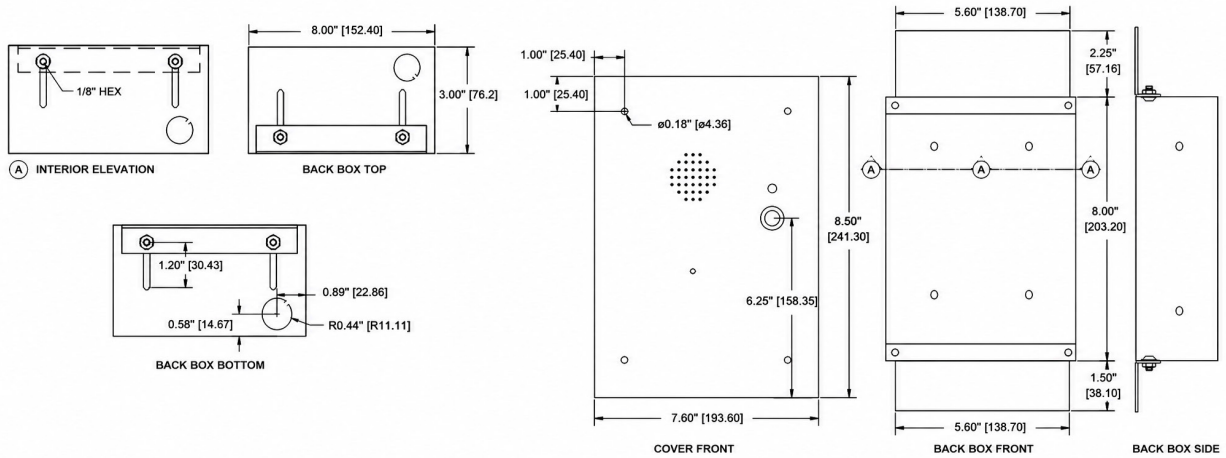

2400-808SSPC2

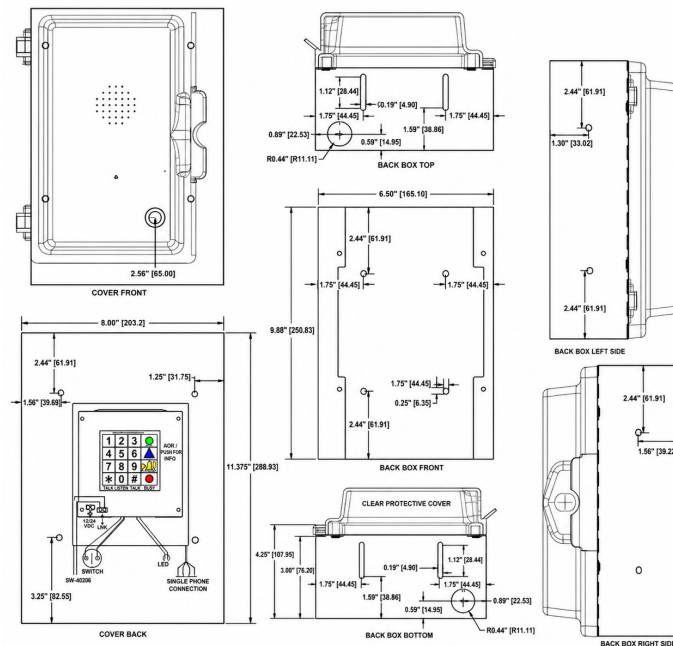

AVIRE

N56W24720 N Corporate Cir., Sussex, WI 53089

800-451-1460

sales.us@avire-global.com

avire-global.com/en-us