


SUBRP7900600-T / RP7900601

Elevator Communications Failure Behind-The-Panel Mount



Continuous monitoring for elevator emergency communication systems.

- Monitors elevator emergency phone lines for communication failures.
- Audible and visual alarms notify personnel of phone line loss.
- Junction board monitors up to 10 JANUS® 2100 Series elevator phones.
- Compact boards integrate easily into OEM control panels.
- Compatible with custom elevator fixture designs.
- Compliant with ASME A17.1, CSA B44, and UL requirements.

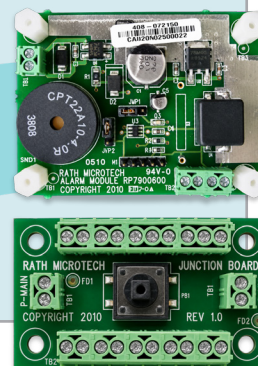

Specifications

	SUBRP7900600-T Alarm Board	RP7900601 Junction Board
Dimensions	2" H × 2.7" W × 0.48" D	1.3" H × 2.25" W × 0.44" D
Weight	0.34 lbs	0.28 lbs
Included Components	Alarm board and LED	Junction board
Mounting	Behind-The-Panel	
Input Power	24 VAC/VDC	
Wiring	Single pair, 22–24 AWG	
Operating Temperature	32°F to 122°F	
Optional Accessories	Backup power and power supply options	
Warranty	2 Years	

AVIRE

N56W24720 N Corporate Cir., Sussex, WI 53089
800-451-1460

sales.us@avire-global.com
avire-global.com/en-us