

2400-805 Series

Analog Command Center System Surface Mount Call Boxes



Reliable emergency communication for Analog Command Center Systems.

- Hands-free, two-way voice communication.
- Home-run wiring simplifies installation and reduces wiring costs.
- Recordable location message identifies the caller's location.
- Supervises communication when paired with the RATH® 2500-SPRVSR.
- Available in multiple button and enclosure configurations.
- Compliant with IBC, NFPA 72, and ADA requirements.



Specifications

	2400-805SP	2400-805SPM	2400-805RP	2400-805SSPC2
Button Style	Standard	Mushroom	Standard	Standard
Protective Cover	No	No	No	Yes
Enclosure	Stainless Steel	Stainless Steel	Red Powder-Coated	Stainless Steel
Faceplate Dimensions	7.25" x 4.75" x 1.875"			10.0" x 6.68"
Back Box Dimensions	-			9.875" x 6.5" x 3.0"
Cover Dimensions	-			9.75" x 6.5" x 1.25"
Weight	2.25 lbs			2.75 lbs
Mounting	Surface Mount			
Wiring	Single pair, 22-24 AWG			
Max. Wiring Distance	6,200 ft (22 AWG) 3,900 ft (24 AWG)			
Programming	On-site; 25-second recordable location message			
Phone Capabilities	Automatic answer with audible ring			
Supervision	Wire integrity and communication when paired with the RATH® 2500-SPRVSR			
Power Source	RATH® 2500 Distribution Module			
Operating Temperature	32°F to 120°F			
Warranty	2 Years			

AVIRE


N56W24720 N Corporate Cir., Sussex, WI 53089

800-451-1460


sales.us@avire-global.com

avire-global.com/en-us

2400-805SP, 2400-805SPM, 2400-805RP

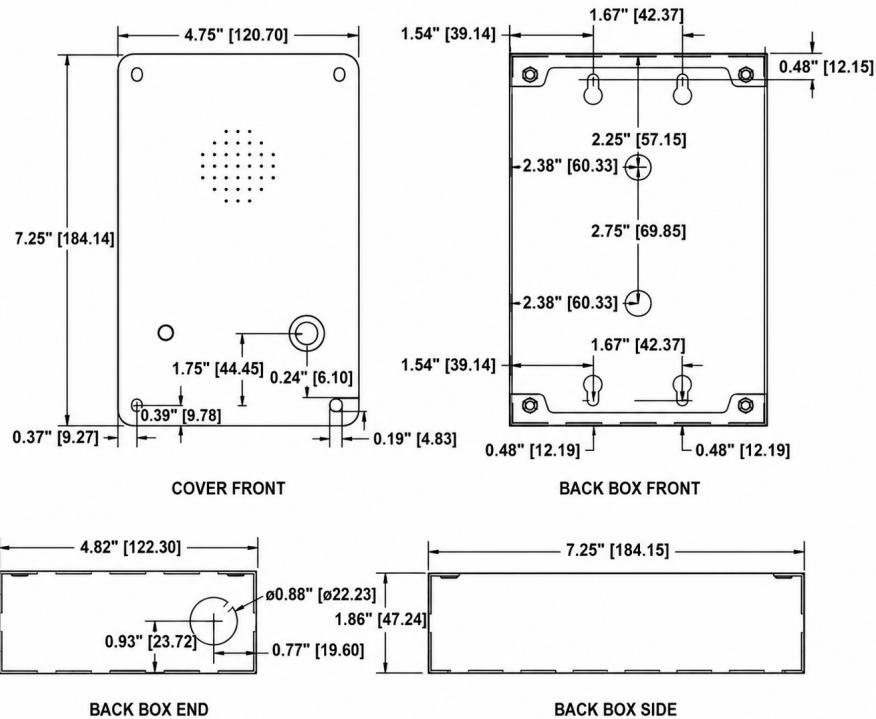

2400-805SSPC2

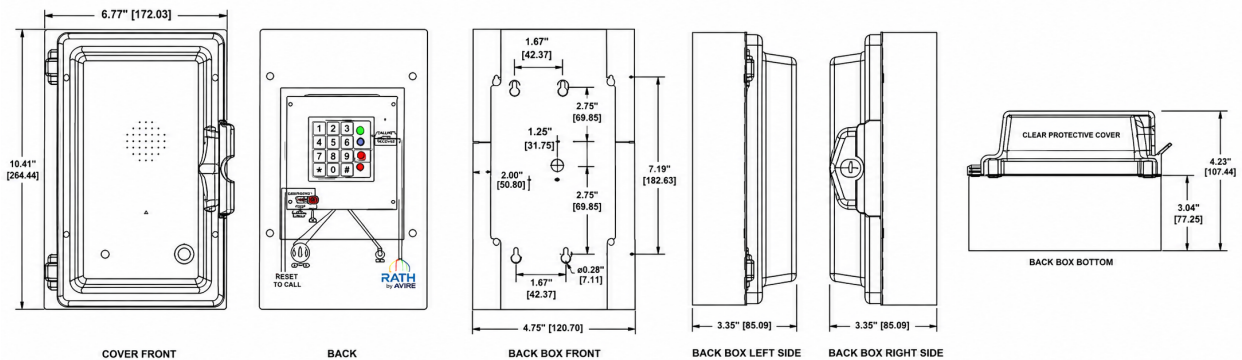

AVIRE

N56W24720 N Corporate Cir., Sussex, WI 53089

800-451-1460

sales.us@avire-global.com

avire-global.com/en-us