


# E-Motive Accessories

## Product Datasheet

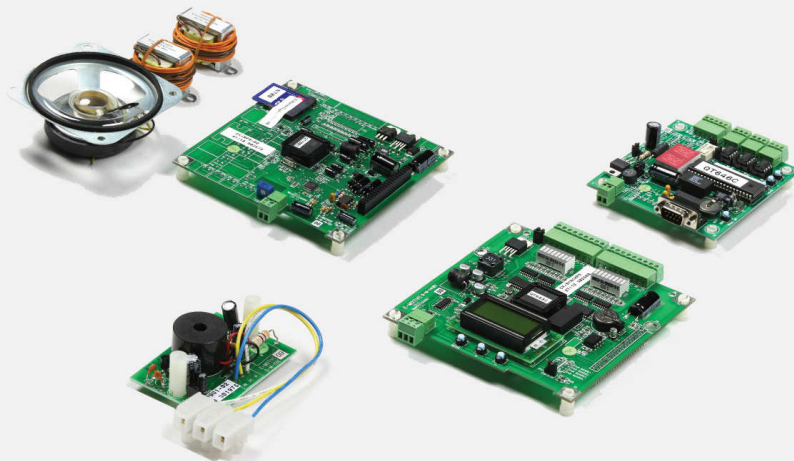

E-Motive's range of Accessories products work to add more useful functions to elevator system.

### Voice Annunciator


- + Speech announcement of elevator position and status information
- + Background music inbetween speech announcements
- + mp3 format speech and music files
- + Supports multiple languages
- + Configurable locally via SD card
- + Speech duration not limited
- + Adjustable volume
- + Speech audio bandwidth up to 16 kHz
- + Supports audio transmission distance up to 150m
- + 8 discrete inputs
- + Available in stackable version to work with Encoder CX-BASIC

### Key Features

- + Speech announcement of elevator position and status information
- + Date and time function on elevator displays
- + Audible feedback for elevator call registration

### Synchronizer

- + Provides date and time to displays
- + Synchronises date and time for displays within a group of multiple elevators
- + Available in stackable version to work with Encoder CX-BASIC
- + **Buzzer**
- + 24VDC input trigger at V+, 0V and Push Feed
- + Works only when elevator is in operation
- + Adjustable volume
- + Meets requirements of EN81-70 for elevator call registration feedback

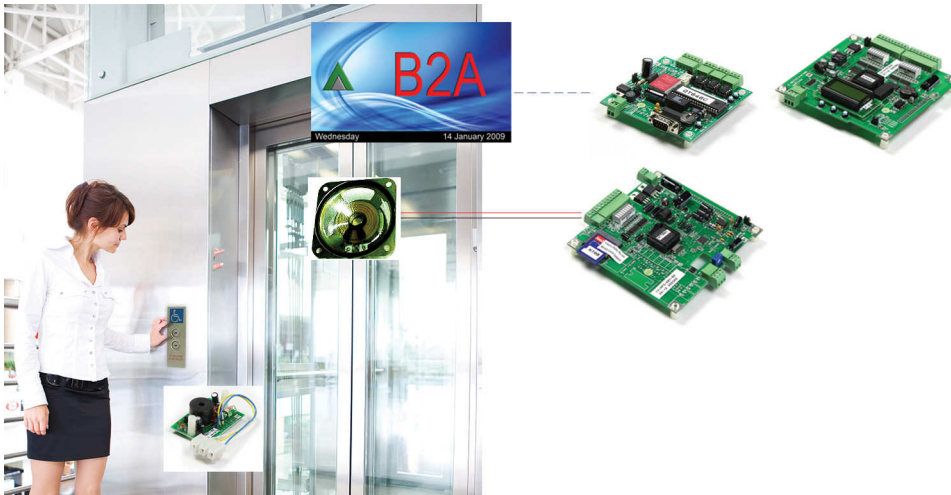

## Technical Specification

Voice Annunciator Type	Standard Standalone	Stackable
Overall Dimensions (mm)	132x143x23	132x134x 23
Supply Voltage (VDC)	24	NA
Signal Interface	Discrete 8 Inputs, RS-485	from CX-BASIC
I/O Interface	8ohm Speaker Output	8ohm Speaker Output

Synchronizer Type	Standard Standalone	Stackable
Overall Dimensions (mm)	132x143x23	128x125x26
Supply Voltage (VDC)	24	NA
Signal Interface	RS-485	from CX-BASIC
I/O Interface	NA	NA

Buzzer Type	Standard	Loud
Overall Dimensions (mm)	60x42x17	60x42x25
Supply Voltage (VDC)	NA	NA
Signal Interface	24VDC input trigger at V+, 0V and Push Feed	24VDC input trigger at V+, 0V and Push Feed
I/O Interface	NA	NA

## Ordering Information

Part No.	Product Description
CX-MP3-001	Voice Annunciator
CX-MP3	Voice Annunciator, Stackable
PX7017S0001	Synchronizer
CX-SYNCHRO	Synchronizer, Stackable
BUZZ0900	Buzzer
BUZZ0901	Buzzer, Loud

# AVIRE

E-Motive is a brand of Avire

### Avire Ltd

8 Admiralty Street,  
#05-02 Admirax,  
Singapore 757438

T: +65 6776 4111  
F: +65 6774 7555  
E: sales.sg@avire-global.com  
W: www.emotivedisplay.com  
W: www.avire-global.com