


7200M

SmartView 2 Modular Unit



Modular elevator communication with flexible installation.

- Modular design uses external camera and phone to maximize panel space.
- Power and data run over a single wire pair.
- Configures on-site using a laptop or mobile device.
- Encrypted system protects network and data.
- Enables remote monitoring through the SmartView Hub.
- Compliant with ADA, ASME A17.1, CSA/B44, IBC, ISED, and FCC requirements. UL listed.

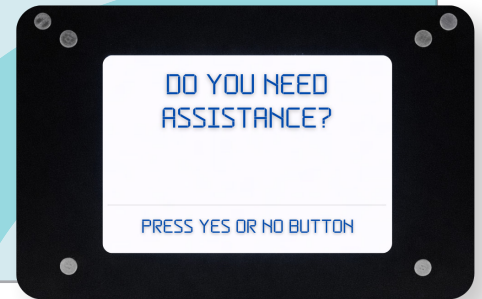

Specifications

	7200M-C118 Elevator Unit	7200M-C156 Elevator Unit	7100 Machine Room Unit
Lens Cover	0.118"	0.156"	N/A
Mounting	Behind-The-Panel		Wall Mount
Dimensions	3.72" x 5.59" x 1.77"		4.25" x 6.10" x 1.73"
Enclosure	Powdered-Coated Stainless Steel, Heavy-Duty ABS		Heavy-Duty ABS
Weight	0.45 lbs		0.65 lbs
Power Source	RATH® 7100		110 VAC
Wiring Requirements	Connect via 18 AWG Single Pair to RATH® 7100		Ethernet
Environmental	32 - 122°F		32 - 122°F
Warranty	2 Years		2 Years
Voltage	24 VDC (from RATH® 7100)		24 VDC
Included Components	7200M Hardware on Mounting Bracket, Terminal Connectors		7100 Hardware, 24 VDC Transformer, Terminal Connectors, Mounting Kit
Site Requirements	"Yes / No" or "Door Open / Door Closed" Buttons on Elevator Panel, RATH® 2100-SVCF, External Elevator Emergency Phone		110 VAC Battery Backed Up Power, Outbound Routed Internet Connection

AVIRE

N56W24720 N Corporate Cir., Sussex, WI 53089

800-451-1460

sales.us@avire-global.com


avire-global.com/en-us

Supplementary Information


Industry Canada No.	C22.2 No.60950-1-07, 2nd Ed: 33399-7100
FCC Reg. No	AW7TE01A7200
Electrical	
Transformer	120 VAC @ 60 Hz input, 24 VAC @ 2.5A output

Diagrams

7200M-C118
7200M-C156

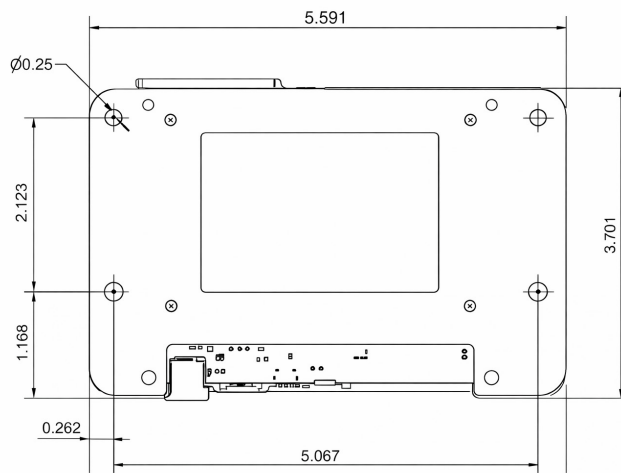

7100

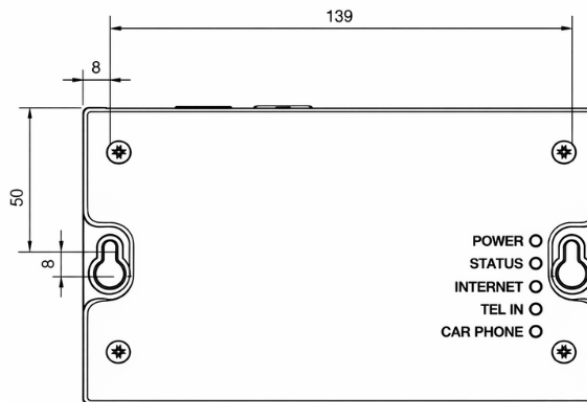

AVIRE

N56W24720 N Corporate Cir., Sussex, WI 53089
800-451-1460

sales.us@avire-global.com

avire-global.com/en-us